



Commercial Blinds Circus FR



CI/SfB 1976 reference by SfB Agency

(76.7)

X

AFFINITI™
BLINDS FOR LIVING



Circus FR Fabric Performance Data

Fabric Colour	Solar			Optical			Colour Fastness	Fabric Weight g/m2	Fabric Thickness mm
	T%	R%	A%	T%	R%	A%			
Cotton Candy	18	74	8	16	84	0	6	265-315	0.55-0.72
Crème Brulee	19	71	10	19	80	1	6	265-315	0.55-0.72
Fudge	8	50	42	6	53	41	6	265-315	0.55-0.72
Powder Blue	8	45	47	3	39	58	6	265-315	0.55-0.72
Iceberg	11	51	38	8	55	37	6	265-315	0.55-0.72
Chocco	4	18	78	0	8	92	6	265-315	0.55-0.72
Chianti	3	22	75	0	13	87	6	265-315	0.55-0.72
Chocolate Box	3	30	67	1	26	63	6	265-315	0.55-0.72
Ultramarine	5	26	69	0	9	91	6	265-315	0.55-0.72
Pistachio	10	46	44	8	34	58	6	265-315	0.55-0.72

T% - Transmitted R% - Reflected A% - Absorbed

Fire Regulations

This fabric meets with fire regulations specified by European standards. The fabric has either been woven with non-flammable fibre glass, Trevira CS or impregnated/coated with fire retardants. Details of the standards are given below;

BS 5867 Part 2 Type B (British)

In accordance with BS 5438: 1976 test method 2. Textile Fabrics & Fabric Assemblies subjected to a small igniting flame.

M1 Standard (French)

In accordance with NF P 92 - 503. The test is particularly hard on synthetic fabrics like fibreglass and polyester.

B1 Standard (German)

In accordance with Din 4102-B1. The test is particularly hard on natural fabrics.

Technical Performance

Architects and design engineers use the solar and optical properties of fabrics to assist in the design of temperature control systems within buildings.

The installation of window blinds can be more cost effective than installing an air conditioning system, to control the heat within a building.

The installation of suitable window blinds can reduce the glare within a building, which is particularly relevant where computers are used intensively. There are legal obligations stated in the health and safety regulations for areas with display screen equipment (i) (ii) require that 'windows shall be fitted with a suitable system of adjustable covering to attenuate the daylight that falls on the workstation.'

Colour Fastness

The colour fastness indicates the stability of the fabric's colour after subjection to natural light.

Measured against a scale of 1-8.

Where 1 is poor and 8 is good.

British Standard = 4

Technical Properties

The technical properties are given for each fabric colour including: Solar & Optical Transmission, Reflectance and Absorption.

Solar & Optical Transmission

The ratio of the amount of total solar or optical energy allowed to pass through a glazing system and blind to the amount of total solar or optical energy falling onto the glazing system.

Expressed as a percentage or decimal portion of a total unit of 1. For example, if half the total solar or optical energy transmits through a glazing system its solar or optical transmittance would be expressed as 50% or 0.50.

Solar & Optical Reflectance

The ratio of the amount of total solar or optical energy which is reflected outward by a glazing system to the amount of total solar or optical energy falling on the glazing system. Expressed as a percentage or decimal portion of a unit of 1.00.

Solar & Optical Absorption

The ratio of the amount of total solar or optical energy absorbed by a glazing system to the amount of total solar or optical energy falling on the glazing system. Expressed as a percentage or decimal portion of a total unit of 1.00.

Absorption = 1.00 - (transmittance + reflectance)

Foot notes:

(i) In response to the EU DIRECTIVE 90/270 passed in 1990, which deals with daylight regulation at the office environment. Foundation for legislation in European countries.

(ii) Department of Employment The health and safety (display screen equipment) regulations 1992. Statutory Instrument 1992 No 2792. London, HMSO, 1992.

APPROVED SUPPLIER:



Circus FR




Cotton Candy



Crème Brulee




Fudge

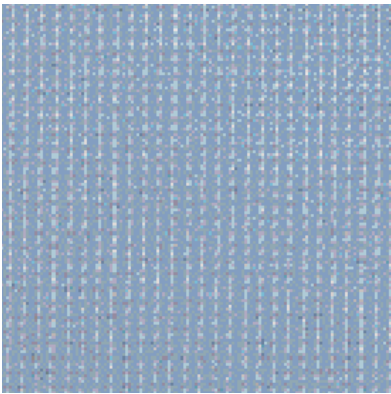


Powder Blue




Iceberg

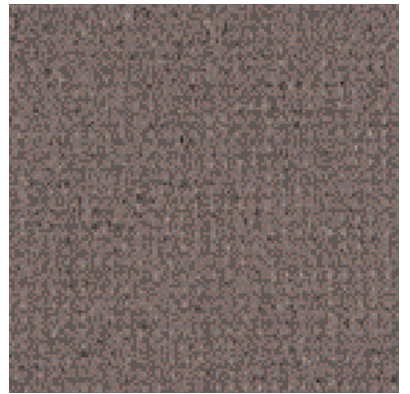


Chocco

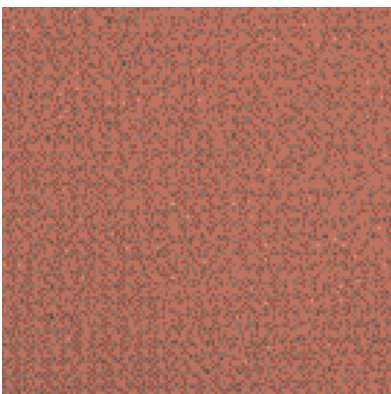


Chianti

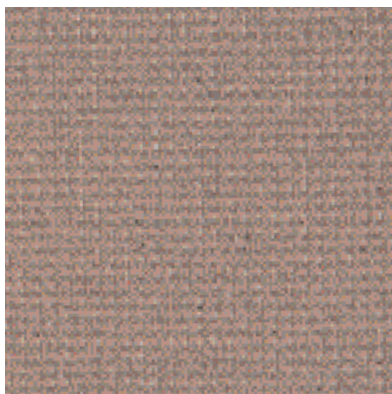

Chocolate Box

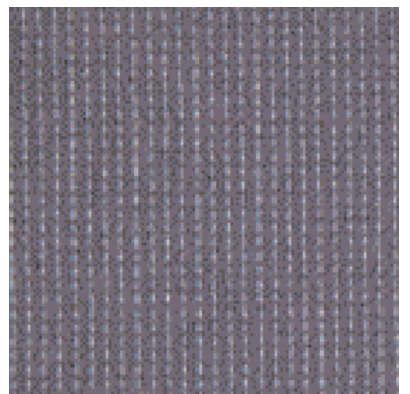

Ultramarine

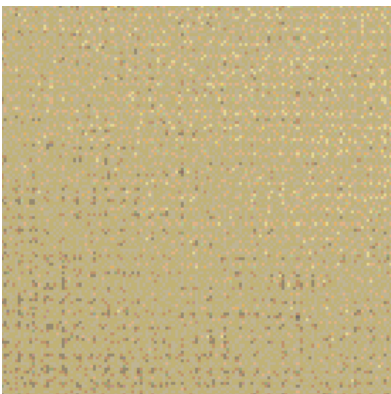


Pistachio



Circus FR


Colour Range	10
Louvre Widths Available	89mm (3.5") 127mm (5") 240mm
Roller Blind Width	2000mm
Fabric Composition	100% Polyester
Fabric Weights	265-315g/m ²
Flammability Standards	BS 5867 Part 2 Type B (British)
Colour Fastness	6
Availability	On stock
Fabric Samples	Available on request

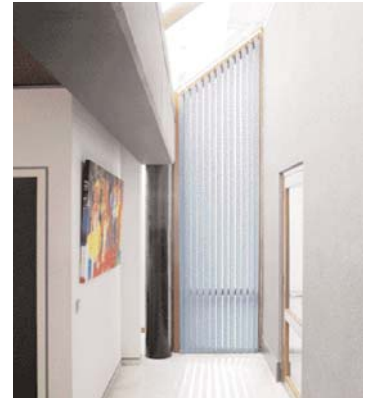


Features




FR Certification:
BS5867 Part 2
Type B



Suitable for
Moist Conditions



Suitable for
Computer
Environments



Available as
Roller & Vertical



Dimout



Colour reproduced here may vary from the actual colours due to the limitations of the limitations of the printing process. Great care has been taken to ensure that the fabric swatches and the information supplied are correct, however specifiers and customers are advised to check the suitability of materials before use.

LARGER SAMPLES ARE AVAILABLE ON REQUEST