


Eco Thermal Blinds

Edge Fitting




A

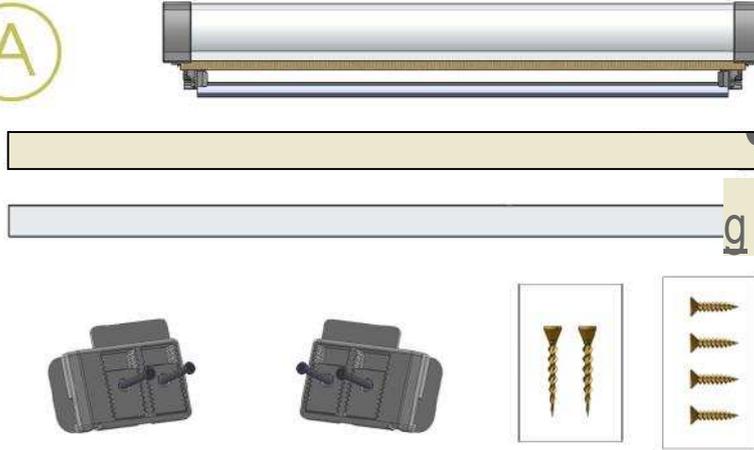

B
Fit the brackets



② Locate guide dog flush to the head of the wall and the recess at the desired location. Push into position. Then hammer the masonry pins into position on each side

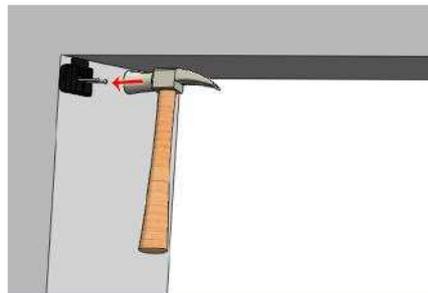

③ Mount cassette onto guide dogs and check level. This is done by lowering the blind to see if running off the square. If so, adjust using id guide dogs as shown in next step




C
Install Blind

(iD) Adjust blocks up and down for leveling if required $d=I=11$



6mm of adjustment is available on both sides

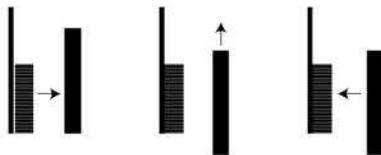

A: Remove block - B: Adjust block - C: Replace block

② Remount cassette onto guide dogs as per step B3.

Repeat if required to level ---->

Not Level (Off-Square)




Level (Square)



Then fix cassette onto guide dogs using screws provided (Left and Right)



D
Centralise Handle

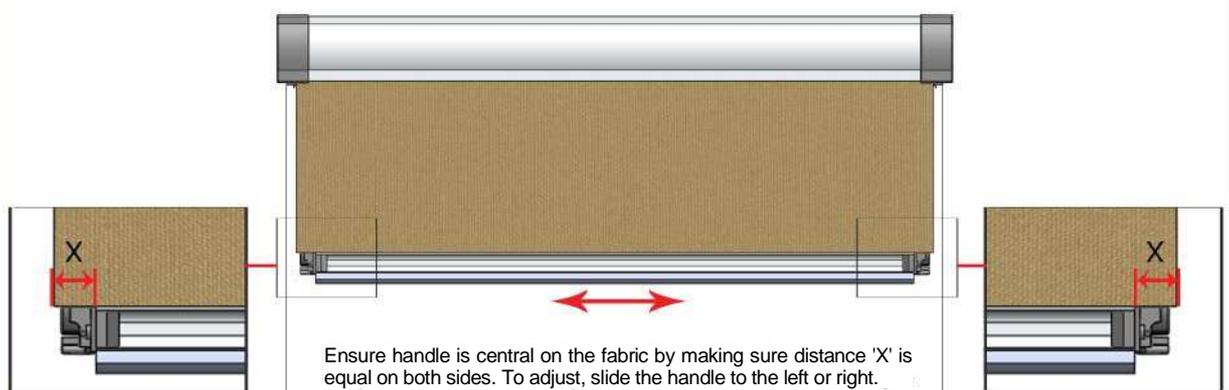


Ensure handle is central on the fabric by making sure distance 'X' is equal on both sides. To adjust, slide the handle to the left or right.

F

Install Siderails (1)


1

To install the side rails, slide the fabric and handle into the slot on the first side rail

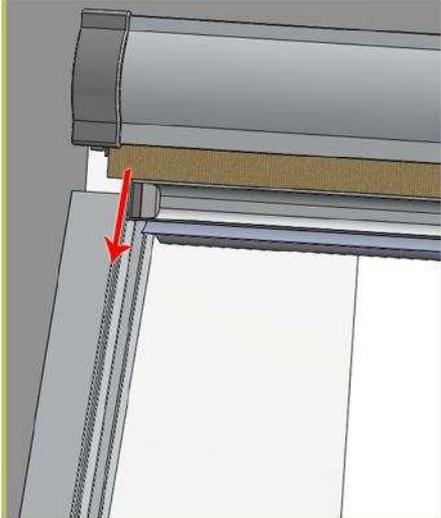


2

Push the side rail up to the cassette and slide it just under the front face

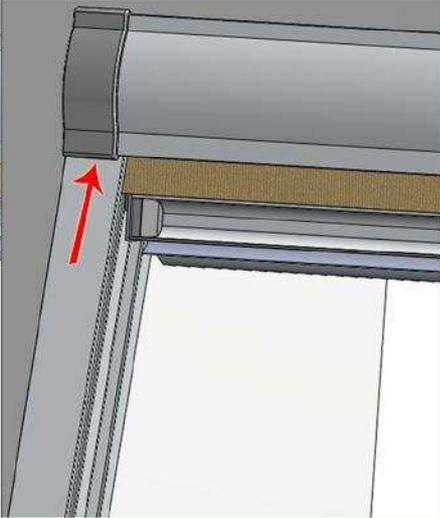

3

It will now be possible to pivot the side rail into place along the wall edge

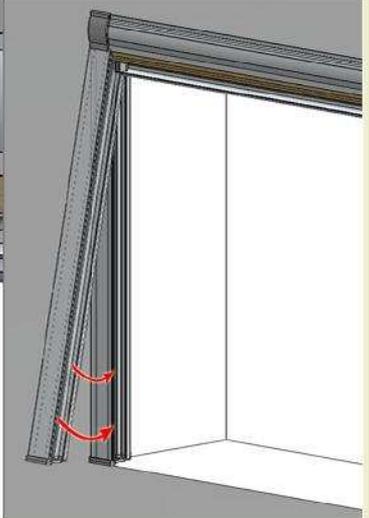



F

Install Siderails (2)

(1) The side rail feet have a slotted hole, to allow adjustability in the direction indicated

(2) Once you are happy with the position of the siderail, fix it in place with one screw into the windowsill

(3) Repeat the steps in sections E and F for the other side rail

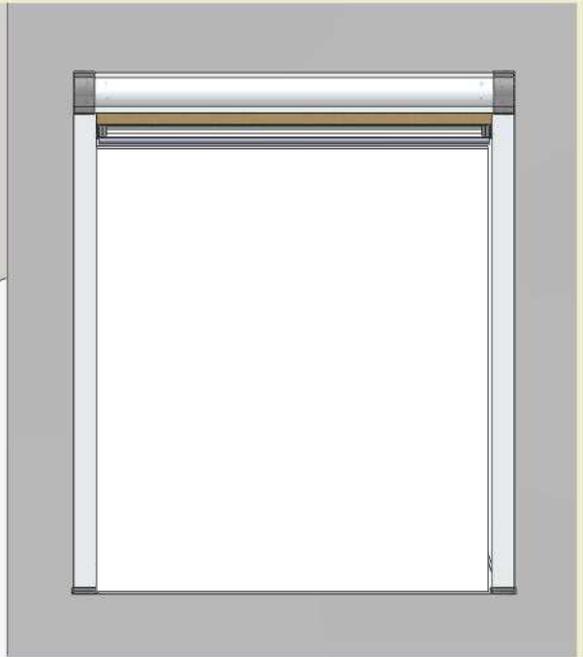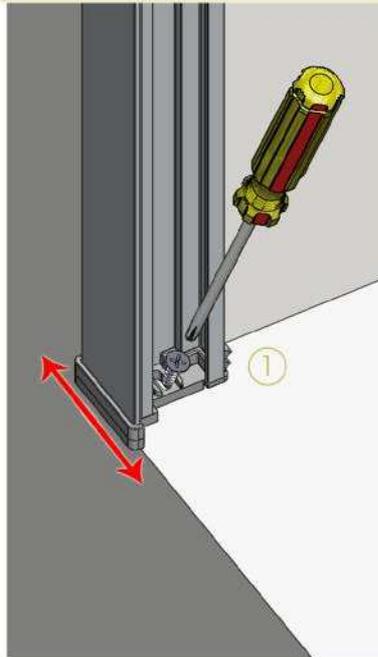

G

How to Operate

(1) To operate the blind, push the handle in; it will rotate away from the side rails and 'unlock'

(2) This will allow you to slide the blind up or down to the desired position

(3) Once the blind is in the desired position, release the handle and the blind will 'lock'

